

# ATP AT-205 Re-Seal Stops Leaks Fast

Fast, effective and safe stop leak for all rubber based seals and gaskets

## ATP AT-205

### Stops leaks in:

**Engine** - Gasoline and Diesel


**Transmission** - Automatic and Manual

**Power Steering** - Rack & Pinion and Steering Box

**Differential** - Conventional and Limited Slip

**Hydraulic Systems** - Plows, Lifts, Jacks and Industrial Equipment

- Professional strength, fast-acting re-sealer
- Compatible with conventional and synthetic oils, ATF, gear oil, power steering fluids and hydraulic oil
- Does not contain petroleum distillates, will not over-swell or breakdown seals, safe with internal components and bearings
- Multipurpose formulation provides stop leak coverage over a variety of systems with a single SKU
- Recognized as an effective product by professional installers and DIY customers

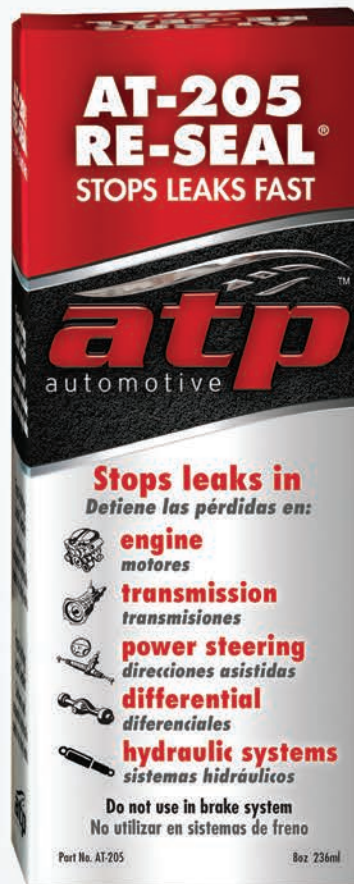

# AT-205 Re-Seal

## Usage Chart

<b>System Capacity</b>	<b>Ounces of AT-205</b>	<b>Approx. Bottles</b>
<b>12 Qts.</b>	<b>16oz</b>	<b>2</b>
<b>10 Qts.</b>	<b>14oz</b>	<b>1 2/3</b>
<b>8 Qts.</b>	<b>12oz</b>	<b>1 1/3</b>
<b>6 Qts.</b>	<b>8oz</b>	<b>1</b>
<b>4 Qts.</b>	<b>6oz</b>	<b>2/3</b>
<b>2 Qts.</b>	<b>3oz</b>	<b>1/3</b>
<b>1 Qt.</b>	<b>1.5oz</b>	<b>1/6</b>

Recommended use is approximate due to blending properties with oil  
No risk if slightly over treated

